



L1

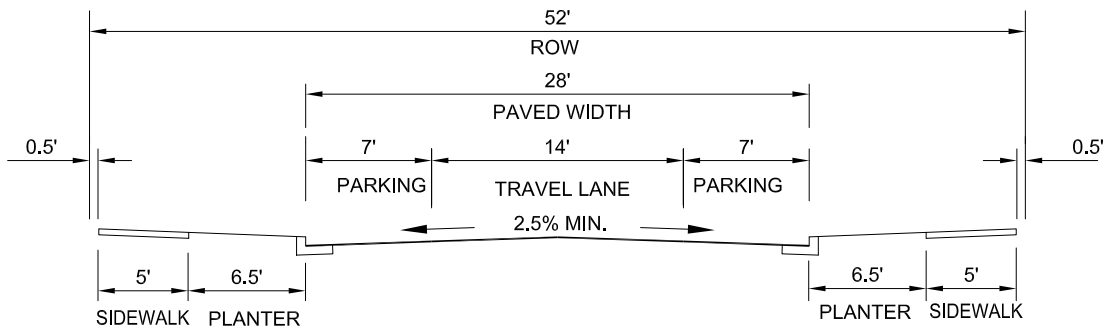

L2

FOR ADT OF ≤ 500 VEHICLES PER DAY

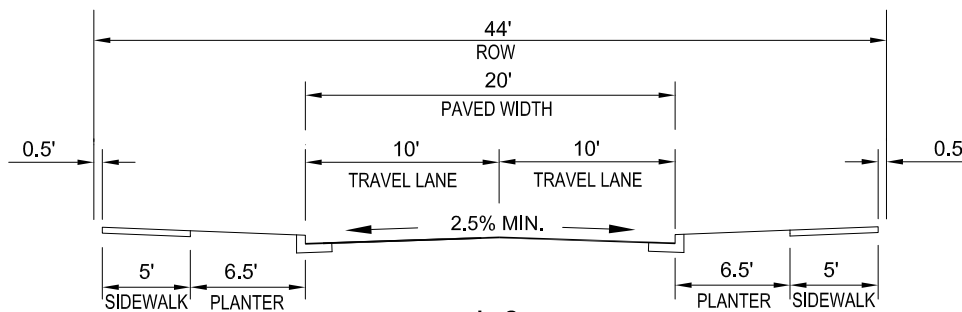

L3

NO PARKING

FOR ADT OF ≤ 500 VEHICLES PER DAY

NOTES:

1. A planter strip is required on all Local Streets.
2. Paved width and planter strip are measured to face of curb.
3. Provide 0.5 feet from right-of-way line to the back of sidewalk for maintenance and survey monument protection.
4. Street trees and street lights are required and shall be located within the planter strip.



City Of Beaverton

ENGINEERING
DEPARTMENT

TRAFFIC ENGINEER
Randall R. Wooley

DATE
6 - 10 - 04

MINIMUM
LOCAL STREET WIDTHS

DRAWN BY
JR - CPD

DRAWING NO.
103